

AT-35/32





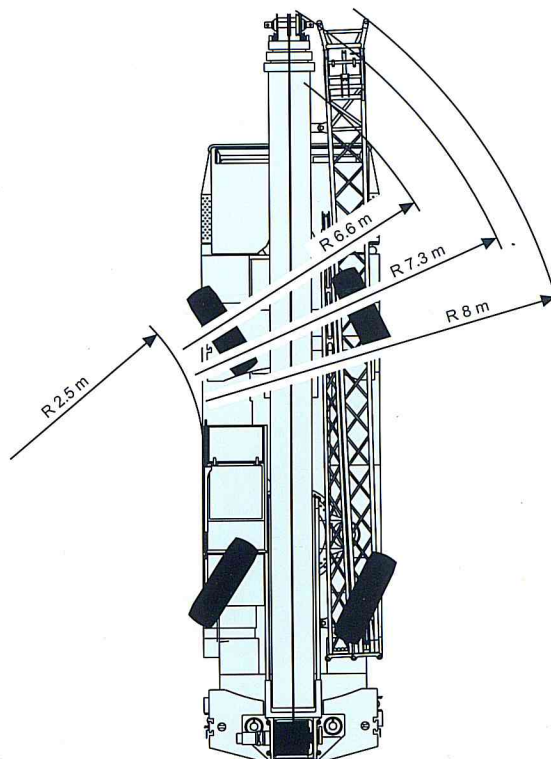


DIAGRAMA DE ALCANCES

AT353200400

RANGE DIAGRAM / DIAGRAMME DES PORTÉES / AUSLADUNGSDIAGRAMM

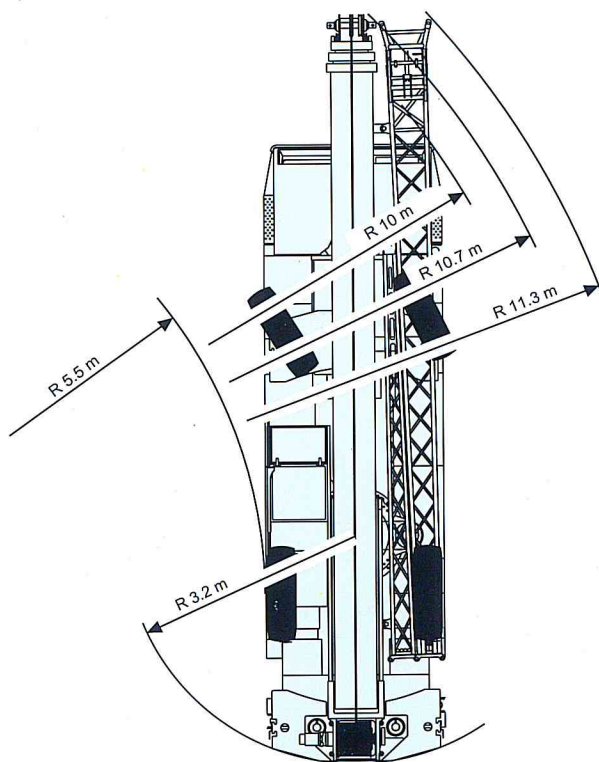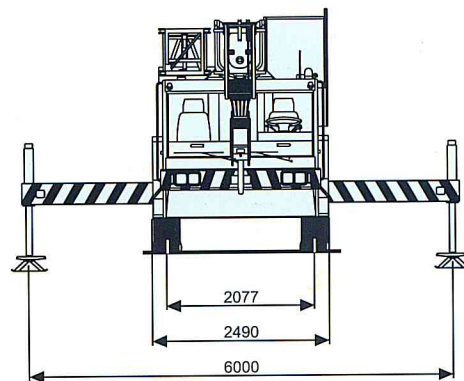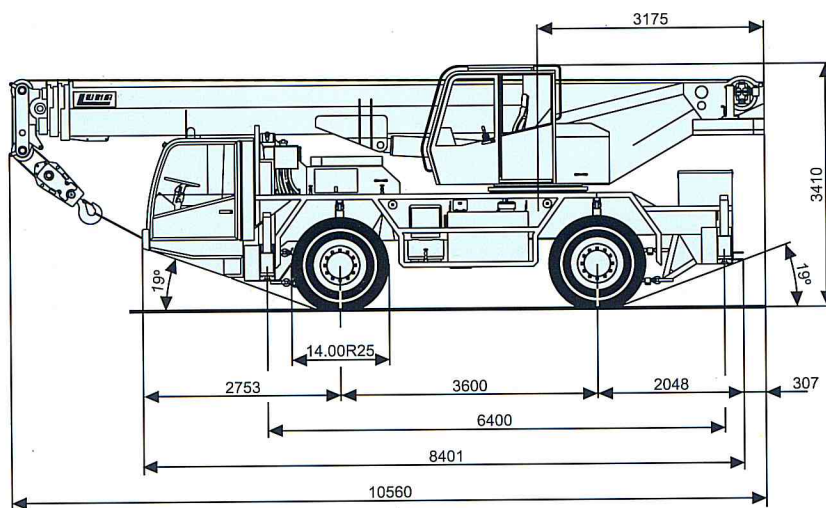

00502

AT-35/32

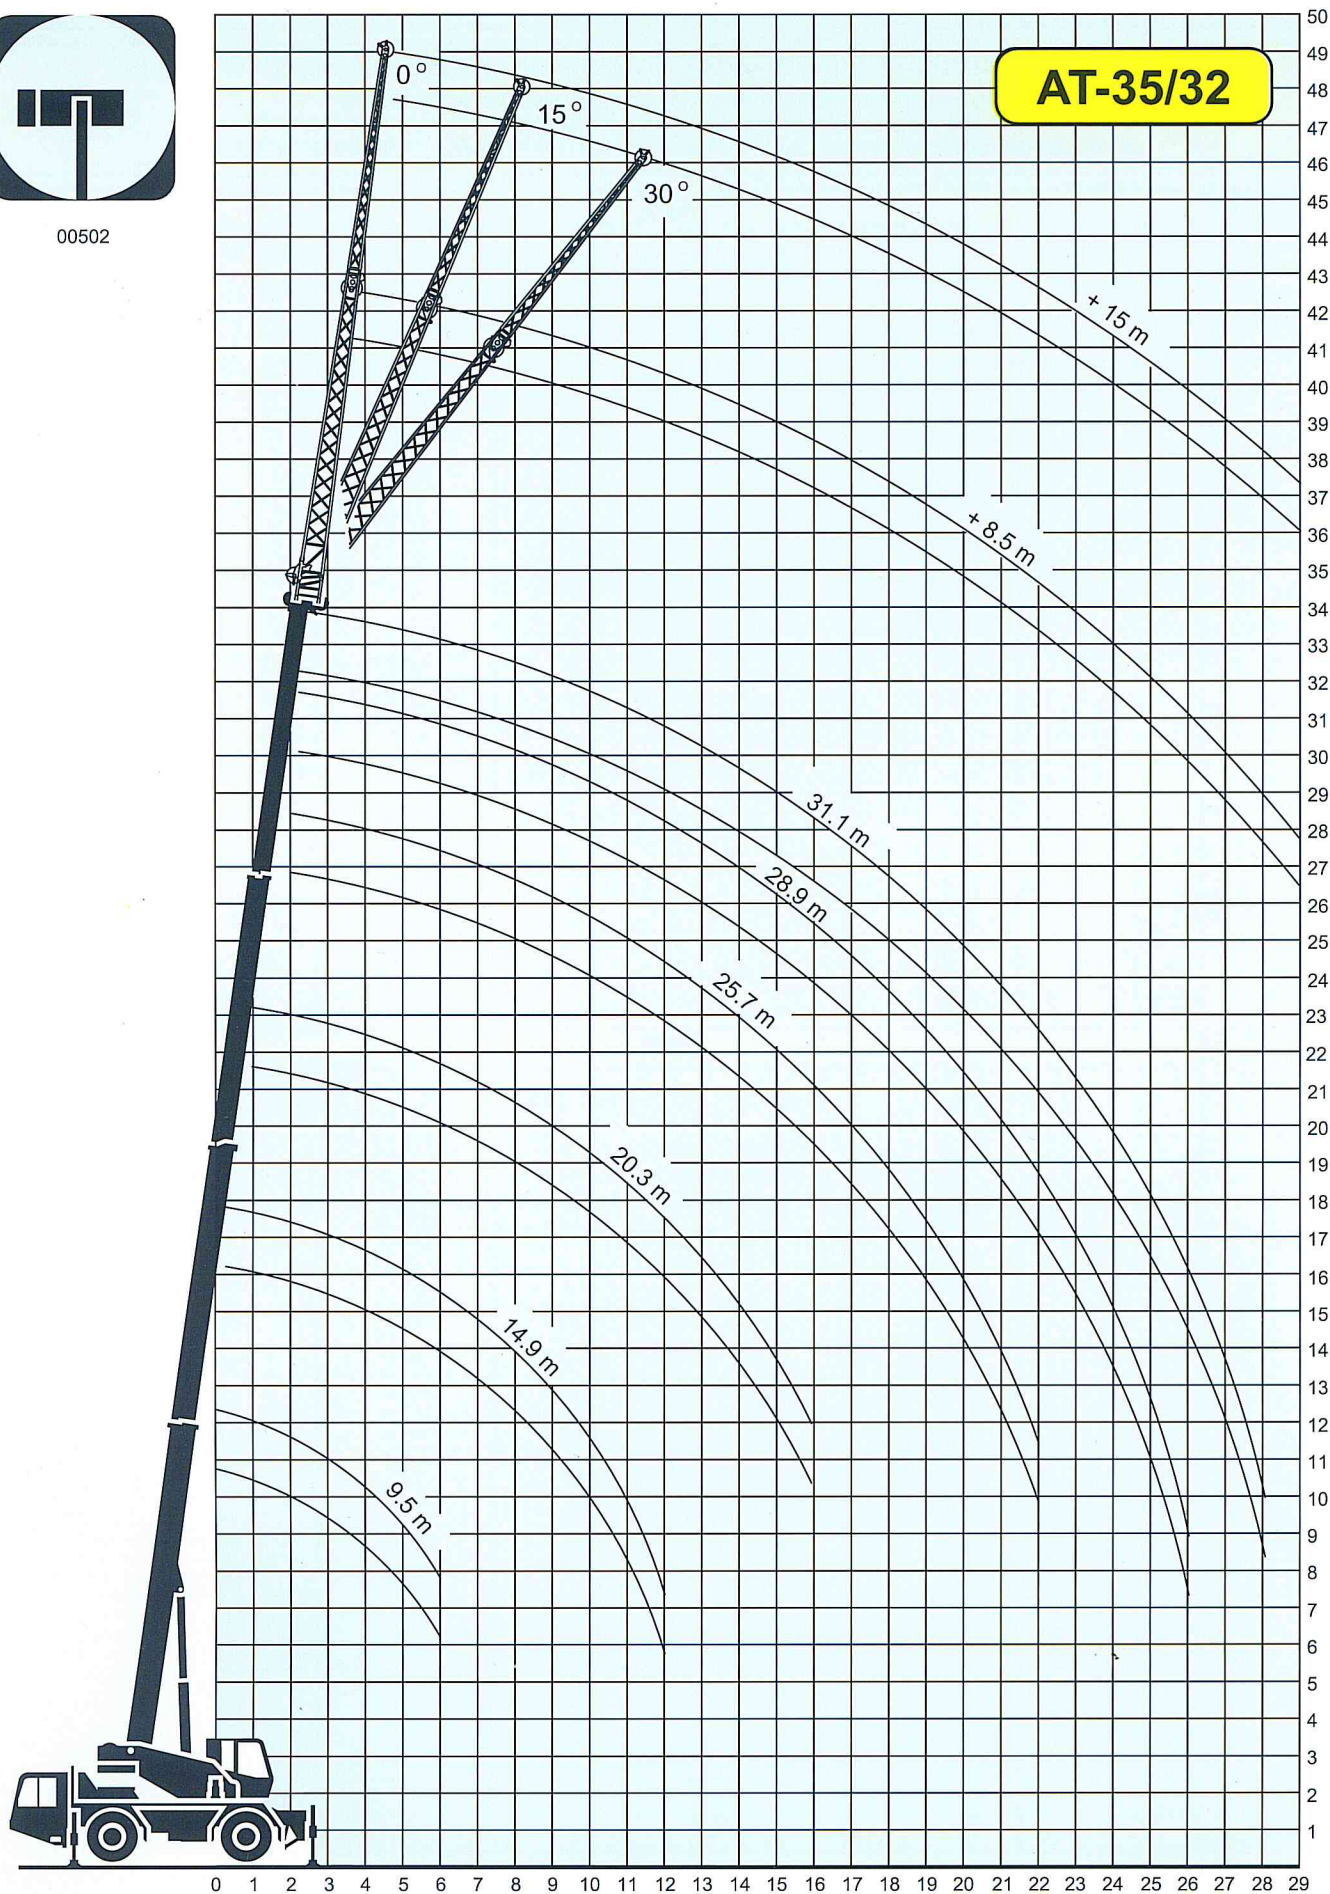


TABLA DE CARGAS

AT353200400

01312-01320

AT-35/32

LIFTING CAPACITIES / FORCES DE LEVAGE / TRAGLASTEN

CONTRAPESO / COUNTERWEIGHT / CONTREPOIDS / BALLAST

5 t

PLUMA PRINCIPAL. GRÚA SOBRE ESTABILIZADORES TOTALMENTE EXTENDIDOS. ZONA DE TRABAJO 360°

MAIN BOOM. CRANE ON FULLY EXTENDED OUTRIGGERS. ROTATION 360°

FLÈCHE PRINCIPALE. GRUE SUR STABILISATEURS EN EXTENSION TOTALE. ROTATION 360°

TELESKOPAUSSLEGER. ARBEITSZUSTAND: ABGESTÜTZT (VOLLE STÜTZBASIS). ARBEITSBEREICH: 360°

RADIO RADIUS PORTÉE AUSLADUNG m	75%						RADIO RADIUS PORTÉE AUSLADUNG m
	LONGITUD DE PLUMA BOOM LENGTH LONGUEUR DE FLÈCHE TELESKOPAUSSLEGERLÄNGEN						
	9.5 m	14.9 m	20.3 m	25.7 m	28.9 m	31.1 m	
3	35.0*/30.0	18.9					3
4	25.4*/23.5	19.9	17.0	13.2			4
5	19.8	20.5	16.7	13.2	9.1	8.2	5
6	16.8	17.0	15.6	13.0	9.1	8.2	6
7		14.0	12.9	11.3	9.1	8.2	7
8		11.0	10.8	10.0	8.8	7.8	8
9		9.0	9.3	8.7	8.1	7.5	9
10		7.5	7.9	7.6	7.3	7.1	10
12		5.3	5.7	5.7	5.6	5.6	12
14			4.3	4.4	4.5	4.5	14
16			3.3	3.4	3.5	3.5	16
18				2.7	2.8	2.8	18
20				2.1	2.2	2.2	20
22				1.7	1.8	1.8	22
24					1.4	1.4	24
26					1.1	1.1	26
28						0.8	28

RADIO RADIUS PORTÉE AUSLADUNG m	85%						RADIO RADIUS PORTÉE AUSLADUNG m
	LONGITUD DE PLUMA BOOM LENGTH LONGUEUR DE FLÈCHE TELESKOPAUSSLEGERLÄNGEN						
	9.5 m	14.9 m	20.3 m	25.7 m	28.9 m	31.1 m	
3	35.0*/30.0	18.9					3
4	25.4*/23.5	19.9	17.0	13.2			4
5	21.0	20.5	16.7	13.2	9.1	8.2	5
6	17.5	17.5	16.7	13.2	9.1	8.2	6
7		15.0	14.2	12.4	9.1	8.2	7
8		12.1	11.9	11.0	9.1	8.2	8
9		9.9	10.2	9.6	8.9	8.2	9
10		8.3	8.7	8.4	8.0	7.8	10
12		5.8	6.3	6.3	6.2	6.2	12
14			4.7	4.8	5.0	5.0	14
16			3.6	3.7	3.9	3.9	16
18				3.0	3.1	3.1	18
20				2.3	2.4	2.4	20
22				1.9	2.0	2.0	22
24					1.5	1.5	24
26					1.2	1.2	26
28						0.9	28

I-II-III	0	25	50	75	90	100	I-II-III
----------	---	----	----	----	----	-----	----------